

有关敝公司产品的注意事项

请务必在使用敝公司产品之前阅读。



注意

产品目录中的记载内容

本产品目录中所记载的内容为2019年10月的内容。因产品改良等原因，可能会不经预告而变更其记载内容，或是停止供应本产品目录中所记载的产品。所以，请务必在使用前先确认最新的产品信息。

未按照本产品目录中所记载的内容或交货规格说明书使用敝公司产品，即便其致使用设备发生损害、不良情况等时，敝公司也不承担任何责任，敬请知悉。

签署交货规格说明书

就本产品目录中所记载产品的产品规格等相关内容，敝公司备有交货规格说明书，详情请向敝公司咨询。在使用敝公司产品前请务必就交货规格说明书之内容确认并批准之。

实装前的事前评估

使用敝公司产品时，请务必事先安装到使用设备之后，在实际使用的环境下进行评估和确认。

用途的限定

1. 可以使用的设备

本产品目录中所记载的产品预设为使用于一般电子设备 [音像设备、办公自动化设备、家电产品、办公设备、信息通讯设备 (手机、电脑等)] 以及面向本产品目录或是交货规格说明书中另行注明的设备的通用性、标准性用途。

另外，面向汽车用电子设备、电信基础设施 / 工业设备、医疗设备 (国际 (GHTF) 第一类、第二类、第三类) 方面的应用，敝公司也备有预设的产品线，请参考本产品目录或是交货规格说明书的内容，使用相对应的产品。

2. 需要另行确认的设备

若考虑将本产品目录中所记载的产品使用于当产品发生故障、品质不良，或是由此引起的运转失常而可能会危及生命、身体或是财产，以及有可能给社会造成深刻影响的以下设备 (不包括本产品目录或是交货规格说明书中另行注明可以使用设备) 等时，请务必事先向敝公司咨询。

- (1) 运输用设备 (汽车驱动控制设备、火车控制设备、船舶控制设备等)
- (2) 交通信号设备
- (3) 防灾 / 保安设备
- (4) 医疗设备 (国际 (GHTF) 第三类)
- (5) 高公共性信息通讯设备 / 信息处理设备 (电话交换机、电话 / 无线 / 广播电视基站等)
- (6) 其他与上述设备有同等品质与可靠性要求的设备

3. 禁止使用的设备

请勿将敝公司产品使用于对安全性和可靠性有着极高要求的以下设备。

- (1) 航天设备 (人工卫星、火箭等)
- (2) 航空设备 ^(注释1)
- (3) 医疗设备 (国际 (GHTF) 第四类)、植体 (体内植入型) 医疗设备 ^(注释2)
- (4) 发电控制设备 (面向核能 / 水力 / 火力发电厂等的设备)
- (5) 海底设备 (海底中继设备、海中的作业设备等)
- (6) 军事设备
- (7) 其他与上述设备有同等品质与可靠性要求的设备

注释1：仅限于对航空设备的安全运行不产生直接干扰的设备 [机内娱乐设备、机内照明设备、电动座椅、餐饮设备等]，在满足敝公司另行指定的相关条件时，亦可将敝公司产品用于以上用途。在贵公司考虑将敝公司的产品用于以上用途时，请务必事先向敝公司咨询相关的信息。

注释2：包括注入人体内的部分和与此相连接的体外部分。

4. 责任的限制

未经敝公司的事先书面同意，把本产品目录中所记载的产品使用于非敝公司预设用途的设备、前述需要向敝公司咨询的设备或敝公司禁止使用的设备，从而给客户或第三方造成损害的，敝公司不承担任何责任，敬请知悉。

安全设计

需将敝公司的产品使用于对安全性和可靠性要求较高的设备、电路上时，请进行充分的安全性评估和可靠性评估。另外，请通过设置保护电路、保护装置的系统，设置冗余电路不会被单一故障影响安全性的系统等失效导向安全 (fail-safe) 设计，确保充分的安全性。

有关知识产权

本产品目录中所记载的信息是用于说明相关产品的典型操作以及相关应用。此类信息的使用不代表对于敝公司以及第三方的知识产权以及其他权利的使用许可或是不侵权保证。

保证范围

敝公司产品的保证范围仅限于已经交付的敝公司产品本身，由敝公司产品的故障或不良情况所诱发的损害，敝公司不承担任何责任，敬请知悉。但是，以书面形式另行签署了交易基本合同书、品质保证协定书等时，敝公司将根据该合同的条件提供保证。


正规销售渠道

本产品目录中所记载的内容适用于从敝公司营业所、销售子公司、销售代理店 (即“正规销售渠道”) 购买的敝公司产品，并不适用于从其他渠道购买的敝公司产品，敬请知悉。

出口时的注意事项

本产品目录中所记载的部分产品在出口时须事先确认《外汇和对外贸易法》以及美国在出口管理方面的相关法规，并办理相关手续。如有不明之处，请向敝公司咨询。

多层高频High-Q 片状电感器(HK 系列 Q 型/AQ 系列)



回流焊

■ 型号标示法

※使用温度范围: -55~+125℃

H	K	Q	0	6	0	3	S	1	0	N	J	—	T
①			②				③	④			⑤		⑥

△ = 空格

① 类型

代码	类型
HKQ	多层高频High-Q 片状电感器
AQ△	

② 尺寸 (L×W)

代码	外型 (inch)	尺寸 (L×W) [mm]
0603	0603(0201)	0.6×0.3
105△	105(0402)	1.0×0.6

③ 系列码

代码	系列码
△	标准品
S	S
U	U

④ 标称电感值

代码 (例)	标称电感值 [μH]
3N9	3.9
10N	10.0

※N=nH 的小数点

⑤ 电感量公差


代码	容量公差
H	±3%
J	±5%
B	±0.1nH
C	±0.2nH
S	±0.3nH

⑥ 包装

代码	包装
—T	卷盘带装
—E	压纹带1mm 间距0402 专用

■ 标准外型尺寸 / 标准数量

HKQ0603S、HKQ0603U、AQ 105



Type	L	W	T	e	标准数量 [pcs]	
					纸带	压纹带
HKQ0603S HKQ0603U (0201)	0.6±0.03 (0.024±0.001)	0.3±0.03 (0.012±0.001)	0.3±0.03 (0.012±0.001)	0.1±0.05 (0.004±0.002)	15000	—
AQ 105 (0402)	1.0±0.05 (0.039±0.002)	0.6±0.1 (0.024±0.004)	0.5±0.05 (0.020±0.002)	0.175±0.075 (0.007±0.003)	10000	—

单位: mm (inch)

电感器

高频电感器

型号	EHS	标称电感值 [nH]	电感量公差	Q值 (min.)	LQ 测试频率 [MHz]	Q (Typical) 频率 [Hz]					自共振频率 [MHz] (min.)	直流电阻 DC [Ω] (max.)	额定电流 [mA] (max.)	厚度 [mm]
						500M	800M	1.8G	2.0G	2.4G				
HKQ0603S0N6□-T	RoHS	0.6	±0.2nH, ±0.3nH	13	500	>24	>31	>53	>56	>64	10000	0.06	600	0.30 ±0.03
HKQ0603S0N7□-T	RoHS	0.7	±0.2nH, ±0.3nH	13	500	>24	>31	>53	>56	>64	10000	0.07	550	0.30 ±0.03
HKQ0603S0N8□-T	RoHS	0.8	±0.2nH, ±0.3nH	13	500	>24	>31	>53	>56	>64	10000	0.07	550	0.30 ±0.03
HKQ0603S0N9□-T	RoHS	0.9	±0.2nH, ±0.3nH	13	500	>24	>31	>53	>56	>64	10000	0.08	520	0.30 ±0.03
HKQ0603S1N0□-T	RoHS	1.0	±0.2nH, ±0.3nH	13	500	24	31	53	56	64	10000	0.09	490	0.30 ±0.03
HKQ0603S1N1□-T	RoHS	1.1	±0.2nH, ±0.3nH	13	500	19	26	44	47	54	10000	0.12	420	0.30 ±0.03
HKQ0603S1N2□-T	RoHS	1.2	±0.2nH, ±0.3nH	13	500	19	25	42	44	51	10000	0.15	380	0.30 ±0.03
HKQ0603S1N3□-T	RoHS	1.3	±0.2nH, ±0.3nH	13	500	19	25	40	42	47	10000	0.19	330	0.30 ±0.03
HKQ0603S1N4□-T	RoHS	1.4	±0.2nH, ±0.3nH	13	500	19	24	39	41	47	10000	0.11	440	0.30 ±0.03
HKQ0603S1N5□-T	RoHS	1.5	±0.2nH, ±0.3nH	13	500	19	24	39	41	46	10000	0.12	420	0.30 ±0.03
HKQ0603S1N6□-T	RoHS	1.6	±0.2nH, ±0.3nH	13	500	19	24	39	41	46	10000	0.13	410	0.30 ±0.03
HKQ0603S1N7□-T	RoHS	1.7	±0.2nH, ±0.3nH	13	500	19	24	39	41	46	10000	0.15	380	0.30 ±0.03
HKQ0603S1N8□-T	RoHS	1.8	±0.2nH, ±0.3nH	13	500	18	24	39	41	46	10000	0.16	370	0.30 ±0.03
HKQ0603S1N9□-T	RoHS	1.9	±0.2nH, ±0.3nH	13	500	18	23	38	40	45	10000	0.20	330	0.30 ±0.03
HKQ0603S2N0□-T	RoHS	2.0	±0.2nH, ±0.3nH	13	500	17	23	37	39	44	10000	0.24	300	0.30 ±0.03
HKQ0603S2N1□-T	RoHS	2.1	±0.2nH, ±0.3nH	13	500	17	23	37	39	44	10000	0.26	290	0.30 ±0.03
HKQ0603S2N2□-T	RoHS	2.2	±0.2nH, ±0.3nH	13	500	17	23	37	39	43	10000	0.28	270	0.30 ±0.03
HKQ0603S2N3□-T	RoHS	2.3	±0.2nH, ±0.3nH	13	500	17	23	36	38	43	10000	0.30	270	0.30 ±0.03
HKQ0603S2N4□-T	RoHS	2.4	±0.2nH, ±0.3nH	13	500	17	22	36	38	42	10000	0.32	260	0.30 ±0.03
HKQ0603S2N5□-T	RoHS	2.5	±0.2nH, ±0.3nH	13	500	17	22	34	35	39	9500	0.20	330	0.30 ±0.03
HKQ0603S2N6□-T	RoHS	2.6	±0.2nH, ±0.3nH	13	500	17	22	33	35	39	9300	0.22	310	0.30 ±0.03
HKQ0603S2N7□-T	RoHS	2.7	±0.2nH, ±0.3nH	13	500	17	22	33	35	39	9100	0.24	300	0.30 ±0.03
HKQ0603S2N8□-T	RoHS	2.8	±0.2nH, ±0.3nH	13	500	17	22	33	35	39	8900	0.25	290	0.30 ±0.03
HKQ0603S2N9□-T	RoHS	2.9	±0.2nH, ±0.3nH	13	500	17	22	33	35	39	8700	0.28	270	0.30 ±0.03
HKQ0603S3N0□-T	RoHS	3.0	±0.2nH, ±0.3nH	13	500	17	22	33	35	39	8600	0.28	270	0.30 ±0.03
HKQ0603S3N1□-T	RoHS	3.1	±0.2nH, ±0.3nH	13	500	17	22	33	35	39	8400	0.29	270	0.30 ±0.03
HKQ0603S3N2□-T	RoHS	3.2	±0.2nH, ±0.3nH	13	500	17	22	33	35	39	8200	0.30	270	0.30 ±0.03
HKQ0603S3N3□-T	RoHS	3.3	±0.2nH, ±0.3nH	13	500	17	22	33	35	39	8100	0.32	260	0.30 ±0.03
HKQ0603S3N4□-T	RoHS	3.4	±0.2nH, ±0.3nH	13	500	16	22	33	35	39	8000	0.36	240	0.30 ±0.03
HKQ0603S3N5□-T	RoHS	3.5	±0.2nH, ±0.3nH	13	500	16	22	33	35	39	7800	0.40	230	0.30 ±0.03
HKQ0603S3N6□-T	RoHS	3.6	±0.2nH, ±0.3nH	13	500	16	22	33	35	39	7700	0.41	230	0.30 ±0.03
HKQ0603S3N7□-T	RoHS	3.7	±0.2nH, ±0.3nH	13	500	16	22	33	35	38	7600	0.44	220	0.30 ±0.03
HKQ0603S3N8□-T	RoHS	3.8	±0.2nH, ±0.3nH	13	500	16	22	33	35	38	7500	0.48	210	0.30 ±0.03
HKQ0603S3N9□-T	RoHS	3.9	±0.2nH, ±0.3nH	13	500	16	22	33	35	38	7300	0.48	210	0.30 ±0.03
HKQ0603S4N3□-T	RoHS	4.3	±0.2nH, ±0.3nH	13	500	16	21	32	34	37	6500	0.39	230	0.30 ±0.03
HKQ0603S4N7□-T	RoHS	4.7	±0.2nH, ±0.3nH	13	500	16	21	32	34	37	6200	0.44	220	0.30 ±0.03
HKQ0603S5N1□-T	RoHS	5.1	±0.2nH, ±0.3nH	13	500	16	21	32	34	37	5900	0.49	210	0.30 ±0.03
HKQ0603S5N6□-T	RoHS	5.6	±0.2nH, ±0.3nH	13	500	16	21	32	34	37	5500	0.47	210	0.30 ±0.03
HKQ0603S6N2□-T	RoHS	6.2	±0.2nH, ±0.3nH	13	500	16	21	32	33	36	5100	0.52	200	0.30 ±0.03
HKQ0603S6N8□-T	RoHS	6.8	±3%, ±5%	13	500	16	21	31	32	35	4800	0.55	190	0.30 ±0.03
HKQ0603S7N5□-T	RoHS	7.5	±3%, ±5%	13	500	16	20	30	32	34	4600	0.51	200	0.30 ±0.03
HKQ0603S8N2□-T	RoHS	8.2	±3%, ±5%	13	500	16	20	30	31	33	4300	0.57	190	0.30 ±0.03
HKQ0603S9N1□-T	RoHS	9.1	±3%, ±5%	13	500	16	20	30	30	32	4000	0.73	170	0.30 ±0.03
HKQ0603S10N□-T	RoHS	10	±3%, ±5%	13	500	16	20	28	29	31	3800	0.85	160	0.30 ±0.03
HKQ0603S12N□-T	RoHS	12	±3%, ±5%	12	500	16	20	27	27	27	3300	0.85	160	0.30 ±0.03
HKQ0603S15N□-T	RoHS	15	±3%, ±5%	12	500	15	19	24	24	23	2600	0.89	150	0.30 ±0.03
HKQ0603S18N□-T	RoHS	18	±3%, ±5%	11	500	15	19	23	23	21	2300	1.05	140	0.30 ±0.03
HKQ0603S22N□-T	RoHS	22	±3%, ±5%	10	500	15	19	22	22	19	1900	1.29	130	0.30 ±0.03

※型号中的□中标有电感值公差。

■ 型号一览

● HKQ0603U

型号	EHS	标称电感值 [nH]	电感量公差	Q值 (min.)	LQ 测试频率 [MHz]	Q (Typical) 频率 [Hz]					自共振频率 [MHz] (min.)	直流电阻 DC [Ω] (max.)	额定电流 [mA] (max.)	厚度 [mm]
						500M	800M	1.8G	2.0G	2.4G				
HKQ0603U0N6□-T	RoHS	0.6	±0.1nH, ±0.2nH, ±0.3nH	14	500	>35	>47	>75	>80	>88	10000	0.06	900	0.30 ±0.03
HKQ0603U0N7□-T	RoHS	0.7	±0.1nH, ±0.2nH, ±0.3nH	14	500	>35	>47	>75	>80	>88	10000	0.06	900	0.30 ±0.03
HKQ0603U0N8□-T	RoHS	0.8	±0.1nH, ±0.2nH, ±0.3nH	14	500	>35	>47	>75	>80	>88	10000	0.06	900	0.30 ±0.03
HKQ0603U0N9□-T	RoHS	0.9	±0.1nH, ±0.2nH, ±0.3nH	14	500	>35	>47	>75	>80	>88	10000	0.06	900	0.30 ±0.03
HKQ0603U1N0□-T	RoHS	1.0	±0.1nH, ±0.2nH, ±0.3nH	14	500	>35	>47	>75	>80	>88	10000	0.07	850	0.30 ±0.03
HKQ0603U1N1□-T	RoHS	1.1	±0.1nH, ±0.2nH, ±0.3nH	14	500	>35	>47	>75	>80	>88	10000	0.07	850	0.30 ±0.03
HKQ0603U1N2□-T	RoHS	1.2	±0.1nH, ±0.2nH, ±0.3nH	14	500	35	47	75	80	88	10000	0.08	800	0.30 ±0.03
HKQ0603U1N3□-T	RoHS	1.3	±0.1nH, ±0.2nH, ±0.3nH	14	500	32	43	70	74	82	10000	0.09	760	0.30 ±0.03
HKQ0603U1N4□-T	RoHS	1.4	±0.1nH, ±0.2nH, ±0.3nH	14	500	29	39	63	67	75	10000	0.12	640	0.30 ±0.03
HKQ0603U1N5□-T	RoHS	1.5	±0.1nH, ±0.2nH, ±0.3nH	14	500	27	36	59	62	69	10000	0.15	600	0.30 ±0.03
HKQ0603U1N6□-T	RoHS	1.6	±0.1nH, ±0.2nH, ±0.3nH	14	500	25	33	54	57	63	10000	0.19	510	0.30 ±0.03
HKQ0603U1N7□-T	RoHS	1.7	±0.1nH, ±0.2nH, ±0.3nH	14	500	25	32	52	54	61	10000	0.11	680	0.30 ±0.03
HKQ0603U1N8□-T	RoHS	1.8	±0.1nH, ±0.2nH, ±0.3nH	14	500	25	32	51	53	59	10000	0.12	640	0.30 ±0.03
HKQ0603U1N9□-T	RoHS	1.9	±0.1nH, ±0.2nH, ±0.3nH	14	500	24	31	50	53	58	10000	0.13	620	0.30 ±0.03
HKQ0603U2N0□-T	RoHS	2.0	±0.1nH, ±0.2nH, ±0.3nH	14	500	24	31	50	53	58	10000	0.15	600	0.30 ±0.03
HKQ0603U2N1□-T	RoHS	2.1	±0.1nH, ±0.2nH, ±0.3nH	14	500	24	31	50	53	58	10000	0.16	550	0.30 ±0.03
HKQ0603U2N2□-T	RoHS	2.2	±0.1nH, ±0.2nH, ±0.3nH	14	500	24	31	50	53	58	10000	0.20	500	0.30 ±0.03
HKQ0603U2N3□-T	RoHS	2.3	±0.1nH, ±0.2nH, ±0.3nH	14	500	24	31	49	52	58	10000	0.24	460	0.30 ±0.03
HKQ0603U2N4□-T	RoHS	2.4	±0.1nH, ±0.2nH, ±0.3nH	14	500	22	28	45	48	53	10000	0.26	430	0.30 ±0.03
HKQ0603U2N5□-T	RoHS	2.5	±0.1nH, ±0.2nH, ±0.3nH	14	500	22	29	46	49	54	10000	0.28	415	0.30 ±0.03
HKQ0603U2N6□-T	RoHS	2.6	±0.1nH, ±0.2nH, ±0.3nH	14	500	21	27	44	46	51	10000	0.30	405	0.30 ±0.03
HKQ0603U2N7□-T	RoHS	2.7	±0.1nH, ±0.2nH, ±0.3nH	14	500	20	26	41	43	48	10000	0.32	400	0.30 ±0.03
HKQ0603U2N8□-T	RoHS	2.8	±0.1nH, ±0.2nH, ±0.3nH	14	500	20	26	41	43	47	9500	0.20	500	0.30 ±0.03
HKQ0603U2N9□-T	RoHS	2.9	±0.1nH, ±0.2nH, ±0.3nH	14	500	20	26	41	43	47	9300	0.22	480	0.30 ±0.03
HKQ0603U3N0□-T	RoHS	3.0	±0.1nH, ±0.2nH, ±0.3nH	14	500	20	26	41	43	47	9100	0.24	460	0.30 ±0.03
HKQ0603U3N1□-T	RoHS	3.1	±0.1nH, ±0.2nH, ±0.3nH	14	500	20	26	41	43	47	8900	0.25	450	0.30 ±0.03
HKQ0603U3N2□-T	RoHS	3.2	±0.1nH, ±0.2nH, ±0.3nH	14	500	20	26	40	43	47	8700	0.28	415	0.30 ±0.03
HKQ0603U3N3□-T	RoHS	3.3	±0.1nH, ±0.2nH, ±0.3nH	14	500	20	26	40	43	47	8600	0.28	415	0.30 ±0.03
HKQ0603U3N4□-T	RoHS	3.4	±0.1nH, ±0.2nH, ±0.3nH	14	500	20	25	40	43	47	8400	0.29	410	0.30 ±0.03
HKQ0603U3N5□-T	RoHS	3.5	±0.1nH, ±0.2nH, ±0.3nH	14	500	20	25	40	42	46	8200	0.30	405	0.30 ±0.03
HKQ0603U3N6□-T	RoHS	3.6	±0.1nH, ±0.2nH, ±0.3nH	14	500	19	25	40	42	46	8100	0.32	400	0.30 ±0.03
HKQ0603U3N7□-T	RoHS	3.7	±0.1nH, ±0.2nH, ±0.3nH	14	500	19	25	40	42	46	8000	0.36	370	0.30 ±0.03
HKQ0603U3N8□-T	RoHS	3.8	±0.1nH, ±0.2nH, ±0.3nH	14	500	19	25	39	41	45	7800	0.40	355	0.30 ±0.03
HKQ0603U3N9□-T	RoHS	3.9	±0.1nH, ±0.2nH, ±0.3nH	14	500	19	25	39	41	45	7700	0.41	350	0.30 ±0.03
HKQ0603U4N0□-T	RoHS	4.0	±0.1nH, ±0.2nH, ±0.3nH	14	500	18	25	39	41	45	7600	0.44	335	0.30 ±0.03
HKQ0603U4N1□-T	RoHS	4.1	±0.1nH, ±0.2nH, ±0.3nH	14	500	19	25	39	41	45	7500	0.48	320	0.30 ±0.03
HKQ0603U4N2□-T	RoHS	4.2	±0.1nH, ±0.2nH, ±0.3nH	14	500	18	24	37	39	43	7300	0.48	320	0.30 ±0.03
HKQ0603U4N3□-T	RoHS	4.3	±0.2nH, ±0.3nH	14	500	18	24	37	39	43	6500	0.48	320	0.30 ±0.03
HKQ0603U4N6□-T	RoHS	4.6	±0.2nH, ±0.3nH	14	500	18	24	37	39	42	6500	0.39	360	0.30 ±0.03
HKQ0603U4N7□-T	RoHS	4.7	±0.2nH, ±0.3nH	14	500	19	24	37	39	42	6400	0.42	350	0.30 ±0.03
HKQ0603U5N0□-T	RoHS	5.0	±0.2nH, ±0.3nH	14	500	19	24	37	39	42	6200	0.44	335	0.30 ±0.03
HKQ0603U5N1□-T	RoHS	5.1	±0.2nH, ±0.3nH	14	500	19	24	37	39	42	6100	0.45	330	0.30 ±0.03
HKQ0603U5N4□-T	RoHS	5.4	±0.2nH, ±0.3nH	14	500	18	24	36	38	42	5900	0.49	315	0.30 ±0.03
HKQ0603U5N6□-T	RoHS	5.6	±0.2nH, ±0.3nH	14	500	18	24	36	37	41	5500	0.47	325	0.30 ±0.03
HKQ0603U5N9□-T	RoHS	5.9	±0.2nH, ±0.3nH	14	500	18	23	35	36	39	5500	0.47	325	0.30 ±0.03
HKQ0603U6N2□-T	RoHS	6.2	±0.2nH, ±0.3nH	14	500	18	23	35	36	39	5100	0.52	305	0.30 ±0.03
HKQ0603U6N5□-T	RoHS	6.5	±0.2nH, ±0.3nH	14	500	18	23	35	36	39	5100	0.52	305	0.30 ±0.03
HKQ0603U6N8□-T	RoHS	6.8	±3%, ±5%	14	500	18	23	35	36	39	4800	0.55	305	0.30 ±0.03
HKQ0603U7N1□-T	RoHS	7.1	±3%, ±5%	14	500	18	23	35	36	39	4800	0.55	305	0.30 ±0.03
HKQ0603U7N5□-T	RoHS	7.5	±3%, ±5%	14	500	18	23	34	35	38	4600	0.55	305	0.30 ±0.03
HKQ0603U7N8□-T	RoHS	7.8	±3%, ±5%	14	500	17	22	33	34	36	4600	0.51	310	0.30 ±0.03
HKQ0603U8N2□-T	RoHS	8.2	±3%, ±5%	14	500	17	22	33	34	36	4300	0.57	290	0.30 ±0.03
HKQ0603U8N5□-T	RoHS	8.5	±3%, ±5%	14	500	17	22	33	34	36	4300	0.57	290	0.30 ±0.03
HKQ0603U9N1□-T	RoHS	9.1	±3%, ±5%	14	500	17	22	33	34	36	4000	0.65	270	0.30 ±0.03
HKQ0603U9N4□-T	RoHS	9.4	±3%, ±5%	14	500	17	22	33	34	36	4000	0.73	250	0.30 ±0.03
HKQ0603U10N□-T	RoHS	10	±3%, ±5%	14	500	17	22	33	34	36	3800	0.85	230	0.30 ±0.03
HKQ0603U12N□-T	RoHS	12	±3%, ±5%	14	500	17	22	31	32	33	3300	0.85	230	0.30 ±0.03
HKQ0603U15N□-T	RoHS	15	±3%, ±5%	14	500	17	21	28	29	29	2600	0.89	220	0.30 ±0.03
HKQ0603U18N□-T	RoHS	18	±3%, ±5%	14	500	16	21	26	26	25	2300	1.05	205	0.30 ±0.03
HKQ0603U22N□-T	RoHS	22	±3%, ±5%	14	500	16	21	26	26	24	1900	1.29	190	0.30 ±0.03

※型号中的□中标有电感值公差。

▶ 由于篇幅有限，本产品目录中只记载了有代表性的产品规格，若考虑使用敝公司产品时，请确认交货规格说明书中的详细规格。
另外，有关各产品的详细信息(特性图、可靠性信息、使用时的注意事项等)，请参阅敝公司网站 (<http://www.ty-top.com/>)。

型号	EHS	标称电感值 [nH]	电感量公差 ※)	Q值 (min.)	LQ 测试频率 [MHz]	Q (Typical) 频率 [Hz]					自共振频率 [MHz]		直流电阻 DC [Ω]		额定电流 [mA] (max.)		厚度 [mm]
						300	800	900	1500	1800	(min.)	(typ.)	(max.)	(typ.)	-55~ +125°C	-55~ +85°C	
AQ 105 1N0□-T	RoHS	1.0	±0.3nH	8	100	53	129	147	217	244	10000	> 13000	0.07	0.014	710	930	0.50 ±0.05
AQ 105 1N2□-T	RoHS	1.2	±0.3nH	8	100	45	97	110	156	177	10000	> 13000	0.07	0.016	710	930	0.50 ±0.05
AQ 105 1N5□-T	RoHS	1.5	±0.3nH	8	100	35	69	76	104	116	8000	> 13000	0.07	0.030	710	930	0.50 ±0.05
AQ 105 1N8□-T	RoHS	1.8	±0.3nH	8	100	32	61	66	92	100	6000	11000	0.07	0.035	710	930	0.50 ±0.05
AQ 105 2N0□-T	RoHS	2.0	±0.3nH	8	100	38	68	73	94	103	6000	10500	0.08	0.035	660	870	0.50 ±0.05
AQ 105 2N2□-T	RoHS	2.2	±0.3nH	8	100	37	67	71	92	101	6000	10000	0.08	0.040	660	870	0.50 ±0.05
AQ 105 2N4□-T	RoHS	2.4	±0.3nH	8	100	34	54	59	74	86	6000	9600	0.09	0.050	630	820	0.50 ±0.05
AQ 105 2N7□-T	RoHS	2.7	±0.3nH	8	100	30	49	52	67	73	6000	9200	0.09	0.060	630	820	0.50 ±0.05
AQ 105 3N0□-T	RoHS	3.0	±0.3nH	8	100	31	51	54	70	76	6000	8700	0.11	0.070	570	740	0.50 ±0.05
AQ 105 3N3□-T	RoHS	3.3	±0.3nH	8	100	32	54	57	72	79	6000	8300	0.12	0.075	540	710	0.50 ±0.05
AQ 105 3N6□-T	RoHS	3.6	±0.3nH	8	100	33	53	56	71	77	5000	7800	0.14	0.080	500	650	0.50 ±0.05
AQ 105 3N9□-T	RoHS	3.9	±0.3nH	8	100	34	53	56	70	76	4000	7300	0.15	0.085	490	630	0.50 ±0.05
AQ 105 4N3□-T	RoHS	4.3	±0.3nH	8	100	29	47	50	64	71	4000	6900	0.16	0.090	470	610	0.50 ±0.05
AQ 105 4N7□-T	RoHS	4.7	±0.3nH	8	100	30	48	51	65	72	4000	6400	0.17	0.095	450	590	0.50 ±0.05
AQ 105 5N1□-T	RoHS	5.1	±0.3nH	8	100	30	48	51	64	71	4000	6300	0.19	0.110	430	560	0.50 ±0.05
AQ 105 5N6□-T	RoHS	5.6	±0.3nH	8	100	30	48	51	65	71	4000	6200	0.20	0.120	420	550	0.50 ±0.05
AQ 105 6N2□-T	RoHS	6.2	±0.3nH	8	100	31	49	52	66	72	3900	6100	0.22	0.130	400	520	0.50 ±0.05
AQ 105 6N8□-T	RoHS	6.8	±0.3nH	8	100	28	44	49	59	64	3900	6000	0.23	0.130	390	510	0.50 ±0.05
AQ 105 7N5□-T	RoHS	7.5	±5%	8	100	28	45	50	60	65	3700	5500	0.25	0.135	370	490	0.50 ±0.05
AQ 105 8N2□-T	RoHS	8.2	±5%	8	100	29	46	50	62	66	3600	5000	0.27	0.140	360	470	0.50 ±0.05
AQ 105 9N1□-T	RoHS	9.1	±5%	8	100	29	45	49	59	62	3400	4800	0.29	0.150	350	450	0.50 ±0.05
AQ 105 10N□-T	RoHS	10	±5%	8	100	28	45	48	57	60	3200	4500	0.31	0.165	330	440	0.50 ±0.05
AQ 105 12N□-T	RoHS	12	±5%	8	100	26	40	45	51	52	2700	4300	0.39	0.165	300	390	0.50 ±0.05
AQ 105 15N□-T	RoHS	15	±5%	8	100	25	38	42	49	51	2300	4100	0.45	0.190	280	360	0.50 ±0.05

※型号中的□中标有电感值公差。上述以外的电感量公差值，请另外咨询。

Multilayer chip inductors

Multilayer chip inductors for high frequency, Multilayer chip bead inductors

Multilayer common mode choke coils (MC series F type)

Metal Multilayer Chip Power Inductors (MCOIL™ MC series)

PACKAGING


① Minimum Quantity

● Tape & Reel Packaging

Type	Thickness mm (inch)	Standard Quantity [pcs]	
		Paper Tape	Embossed Tape
CK1608 (0603)	0.8 (0.031)	4000	—
CK2125 (0805)	0.85 (0.033)	4000	—
	1.25 (0.049)	—	2000
CKS2125 (0805)	0.85 (0.033)	4000	—
	1.25 (0.049)	—	2000
CKP1608 (0603)	0.8 (0.031)	4000	—
CKP2012 (0805)	0.9 (0.035)	—	3000
CKP2016 (0806)	0.9 (0.035)	—	3000
CKP2520 (1008)	0.7 (0.028)	—	3000
	0.9 (0.035)	—	3000
	1.1 (0.043)	—	2000
LK1005 (0402)	0.5 (0.020)	10000	—
LK1608 (0603)	0.8 (0.031)	4000	—
LK2125 (0805)	0.85 (0.033)	4000	—
	1.25 (0.049)	—	2000
HK0603 (0201)	0.3 (0.012)	15000	—
HK1005 (0402)	0.5 (0.020)	10000	—
HK1608 (0603)	0.8 (0.031)	4000	—
HK2125 (0805)	0.85 (0.033)	—	4000
	1.0 (0.039)	—	3000
HKQ0603S (0201)	0.3 (0.012)	15000	—
HKQ0603U (0201)	0.3 (0.012)	15000	—
AQ105 (0402)	0.5 (0.020)	10000	—
BK0603 (0201)	0.3 (0.012)	15000	—
BK1005 (0402)	0.5 (0.020)	10000	—
BKH0603 (0201)	0.3 (0.012)	15000	—
BKH1005 (0402)	0.5 (0.020)	10000	—
BK1608 (0603)	0.8 (0.031)	4000	—
BK2125 (0805)	0.85 (0.033)	4000	—
	1.25 (0.049)	—	2000
BK2010 (0804)	0.45 (0.018)	4000	—
BK3216 (1206)	0.8 (0.031)	—	4000
BKP0603 (0201)	0.3 (0.012)	15000	—
BKP1005 (0402)	0.5 (0.020)	10000	—
BKP1608 (0603)	0.8 (0.031)	4000	—
BKP2125 (0805)	0.85 (0.033)	4000	—
MCF0605 (0202)	0.3 (0.012)	15000	—
MCF0806 (0302)	0.4 (0.016)	—	10000
MCF1210 (0504)	0.55 (0.022)	—	5000
MCF2010 (0804)	0.45 (0.018)	—	4000
MCEE1005 (0402)	0.55 (0.022)	10000	—
MCEK1210 (0504)	0.5 (0.020)	5000	—
MCFK1608 (0603)	0.6 (0.024)	4000	—
MCFE1608 (0603)	0.65 (0.026)	4000	—
MCHK1608 (0603)	0.8 (0.031)	4000	—
MCKK1608 (0603)	1.0 (0.039)	—	3000
MCHK2012 (0806)	0.8 (0.031)	4000	—
MCKK2012 (0805)	1.0 (0.039)	—	3000

②Taping material

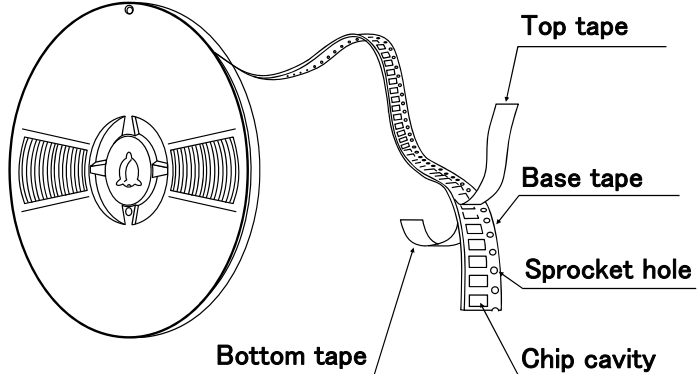
● Card board carrier tape




CK	1608
CKP	1608
CK	2125
CKS	2125
LK	1005
LK	1608
LK	2125
HK	0603
HK	1005
HK	1608
HKQ	0603
AQ	105

BK	0603
BK	1005
BK	1608
BK	2125
BK	2010
BKP	0603
BKP	1005
BKP	1608
BKP	2125
BKH	0603
BKH	1005
MCF	0605
MC	1005
MC	1210
MC	1608
MC	2012

Chip Filled




● Embossed Tape

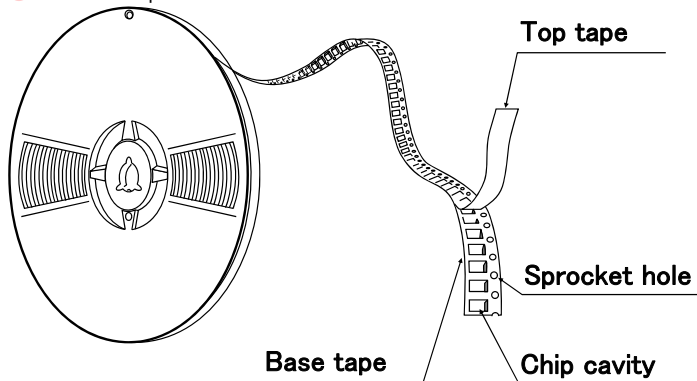

CK	2125
CKS	2125
CKP	2012
CKP	2016
CKP	2520
LK	2125
HK	2125

BK	2125
BK	3216
MCF	0806
MCF	1210
MCF	2010
MC	1608
MC	2012


Chip Filled



③Taping Dimensions

● Paper tape (8mm wide)

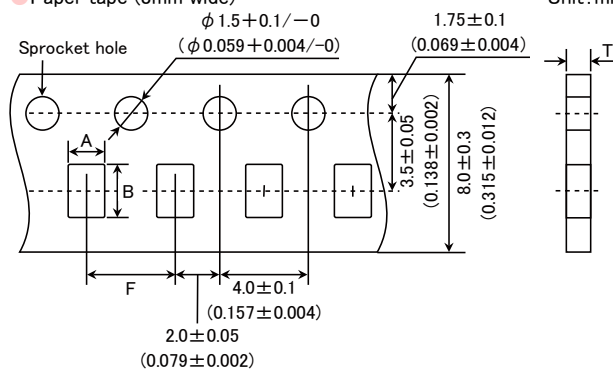Unit: mm (inch)




Type	Thickness mm (inch)	Chip cavity		Insertion Pitch	Tape Thickness
		A	B	F	T
CK1608(0603)	0.8 (0.031)	1.0±0.2 (0.039±0.008)	1.8±0.2 (0.071±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)
CK2125(0805)	0.85(0.033)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)
CKS2125(0805)	0.85(0.033)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)
CKP1608(0603)	0.8 (0.031)	1.0±0.2 (0.039±0.008)	1.8±0.2 (0.071±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)
LK1005(0402)	0.5 (0.020)	0.65±0.1 (0.026±0.004)	1.15±0.1 (0.045±0.004)	2.0±0.05 (0.079±0.002)	0.8max (0.031max)
LK1608(0603)	0.8 (0.031)	1.0±0.2 (0.039±0.008)	1.8±0.2 (0.071±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)
LK2125(0805)	0.85(0.033)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)
HK0603(0201)	0.3 (0.012)	0.40±0.06 (0.016±0.002)	0.70±0.06 (0.028±0.002)	2.0±0.05 (0.079±0.002)	0.45max (0.018max)
HK1005(0402)	0.5 (0.020)	0.65±0.1 (0.026±0.004)	1.15±0.1 (0.045±0.004)	2.0±0.05 (0.079±0.002)	0.8max (0.031max)
HK1608(0603)	0.8 (0.031)	1.0±0.2 (0.039±0.008)	1.8±0.2 (0.071±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)
HKQ0603S(0201)	0.3 (0.012)	0.40±0.06 (0.016±0.002)	0.70±0.06 (0.028±0.002)	2.0±0.05 (0.079±0.002)	0.45max (0.018max)
HKQ0603U(0201)	0.3 (0.012)	0.40±0.06 (0.016±0.002)	0.70±0.06 (0.028±0.002)	2.0±0.05 (0.079±0.002)	0.45max (0.018max)
AQ105(0402)	0.5 (0.020)	0.75±0.1 (0.030±0.004)	1.15±0.1 (0.045±0.004)	2.0±0.05 (0.079±0.002)	0.8max (0.031max)
BK0603(0201)	0.3 (0.012)	0.40±0.06 (0.016±0.002)	0.70±0.06 (0.028±0.002)	2.0±0.05 (0.079±0.002)	0.45max (0.018max)
BK1005(0402)	0.5 (0.020)	0.65±0.1 (0.026±0.004)	1.15±0.1 (0.045±0.004)	2.0±0.05 (0.079±0.002)	0.8max (0.031max)
BK1608(0603)	0.8 (0.031)	1.0±0.2 (0.039±0.008)	1.8±0.2 (0.071±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)
BK2125(0805)	0.85(0.033)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)
BK2010(0804)	0.45(0.018)	1.2±0.1 (0.047±0.004)	2.17±0.1 (0.085±0.004)	4.0±0.1 (0.157±0.004)	0.8max (0.031max)
BKP0603(0201)	0.3 (0.012)	0.40±0.06 (0.016±0.002)	0.70±0.06 (0.028±0.002)	2.0±0.05 (0.079±0.002)	0.45max (0.018max)
BKP1005(0402)	0.5 (0.020)	0.65±0.1 (0.026±0.004)	1.15±0.1 (0.045±0.004)	2.0±0.05 (0.079±0.002)	0.8max (0.031max)
BKP1608(0603)	0.8 (0.031)	1.0±0.2 (0.039±0.008)	1.8±0.2 (0.071±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)
BKP2125(0805)	0.85(0.033)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.1 (0.157±0.004)	1.1max (0.043max)
BKH0603(0201)	0.3 (0.012)	0.40±0.06 (0.016±0.002)	0.70±0.06 (0.028±0.002)	2.0±0.05 (0.079±0.002)	0.45max (0.018max)
BKH1005(0402)	0.5 (0.020)	0.65±0.1 (0.026±0.004)	1.15±0.1 (0.045±0.004)	2.0±0.05 (0.079±0.002)	0.8max (0.031max)
MCF0605(0202)	0.3 (0.012)	0.62±0.03 (0.024±0.001)	0.77±0.03 (0.030±0.001)	2.0±0.05 (0.079±0.002)	0.45max (0.018max)
MCFK1608(0603)	0.6 (0.024)	1.1±0.05 (0.043±0.002)	1.9±0.05 (0.075±0.002)	4.0±0.1 (0.157±0.004)	0.72max (0.028max)
MCEE1005(0402)	0.55(0.021)	0.8±0.05 (0.031±0.002)	1.3±0.05 (0.051±0.002)	2.0±0.05 (0.079±0.002)	0.64max (0.025max)
MCEK1210(0504)	0.5 (0.020)	1.3±0.1 (0.051±0.004)	1.55±0.1 (0.061±0.004)	4.0±0.1 (0.157±0.004)	0.64max (0.025max)
MCFK1608(0603)	0.6 (0.024)	1.1±0.05 (0.043±0.002)	1.9±0.05 (0.075±0.002)	4.0±0.1 (0.157±0.004)	0.72max (0.028max)
MCFE1608(0603)	0.65(0.026)	1.1±0.05 (0.043±0.002)	1.9±0.05 (0.075±0.002)	4.0±0.1 (0.157±0.004)	0.72max (0.028max)
MCHK1608(0603)	0.8 (0.031)	1.2±0.05 (0.047±0.002)	2.0±0.05 (0.079±0.002)	4.0±0.1 (0.157±0.004)	0.9max (0.035max)
MCHK2012(0805)	0.8 (0.031)	1.65±0.1 (0.065±0.004)	2.4±0.1 (0.094±0.004)	4.0±0.1 (0.157±0.004)	0.9max (0.035max)

Unit : mm (inch)

● Embossed Tape (8mm wide)

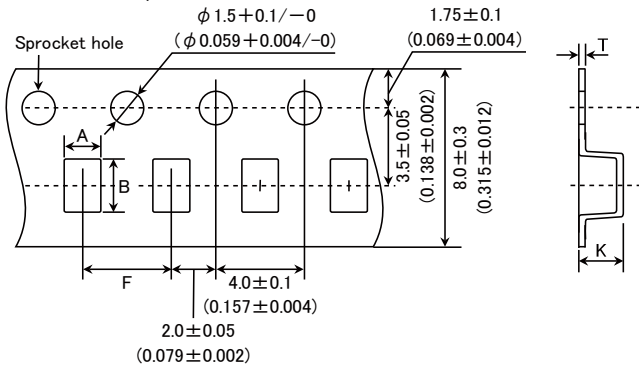
Unit : mm (inch)



Type	Thickness mm (inch)	Chip cavity		Insertion Pitch	Tape Thickness	
		A	B	F	K	T
CK2125(0805)	1.25 (0.049)	1.5 ± 0.2 (0.059 ± 0.008)	2.3 ± 0.2 (0.091 ± 0.008)	4.0 ± 0.1 (0.157 ± 0.004)	2.0 (0.079)	0.3 (0.012)
CKS2125(0805)	1.25 (0.049)	1.5 ± 0.2 (0.059 ± 0.008)	2.3 ± 0.2 (0.091 ± 0.008)	4.0 ± 0.1 (0.157 ± 0.004)	2.0 (0.079)	0.3 (0.012)
CKP2012(0805)	0.9 (0.035)	1.55 ± 0.2 (0.061 ± 0.008)	2.3 ± 0.2 (0.091 ± 0.008)	4.0 ± 0.1 (0.157 ± 0.004)	1.3 (0.051)	0.3 (0.012)
CKP2016(0806)	0.9 (0.035)	1.8 ± 0.1 (0.071 ± 0.004)	2.2 ± 0.1 (0.087 ± 0.004)	4.0 ± 0.1 (0.157 ± 0.004)	1.3 (0.051)	0.25 (0.01)
CKP2520(1008)	0.7 (0.028)	2.3 ± 0.1 (0.091 ± 0.004)	2.8 ± 0.1 (0.110 ± 0.004)	4.0 ± 0.1 (0.157 ± 0.004)	1.4 (0.055)	0.3 (0.012)
	0.9 (0.035)				1.4 (0.055)	
	1.1 (0.043)				1.7 (0.067)	
	1.1 (0.043)				1.7 (0.067)	
LK2125(0805)	1.25 (0.049)	1.5 ± 0.2 (0.059 ± 0.008)	2.3 ± 0.2 (0.091 ± 0.008)	4.0 ± 0.1 (0.157 ± 0.004)	2.0 (0.079)	0.3 (0.012)
HK2125(0805)	0.85 (0.033)	1.5 ± 0.2 (0.059 ± 0.008)	2.3 ± 0.2 (0.091 ± 0.008)	4.0 ± 0.1 (0.157 ± 0.004)	1.5 (0.059)	0.3 (0.012)
	1.0 (0.039)				2.0 (0.079)	
BK2125(0805)	1.25 (0.049)	1.5 ± 0.2 (0.059 ± 0.008)	2.3 ± 0.2 (0.091 ± 0.008)	4.0 ± 0.1 (0.157 ± 0.004)	2.0 (0.079)	0.3 (0.012)
BK3216(1206)	0.8 (0.031)	1.9 ± 0.1 (0.075 ± 0.004)	3.5 ± 0.1 (0.138 ± 0.004)	4.0 ± 0.1 (0.157 ± 0.004)	1.4 (0.055)	0.3 (0.012)
MCF0806(0302)	0.4 (0.016)	0.75 ± 0.05 (0.030 ± 0.002)	0.95 ± 0.05 (0.037 ± 0.002)	2.0 ± 0.05 (0.079 ± 0.002)	0.55 (0.022)	0.3 (0.012)
MCF1210(0504)	0.55 (0.022)	1.15 ± 0.05 (0.045 ± 0.002)	1.40 ± 0.05 (0.055 ± 0.002)	4.0 ± 0.1 (0.157 ± 0.004)	0.65 (0.026)	0.3 (0.012)
MCF2010(0804)	0.45 (0.018)	1.1 ± 0.1 (0.043 ± 0.004)	2.3 ± 0.1 (0.091 ± 0.004)	4.0 ± 0.1 (0.157 ± 0.004)	0.85 (0.033)	0.3 (0.012)
MCKK1608(0603)	1.0 (0.039)	1.1 ± 0.1 (0.043 ± 0.004)	1.95 ± 0.1 (± 0.004)	4.0 ± 0.1 (0.157 ± 0.004)	1.4 (0.055)	0.25 (0.01)
MCKK2012(0805)	1.0 (0.039)	1.55 ± 0.1 (0.061 ± 0.004)	2.35 ± 0.1 (0.093 ± 0.004)	4.0 ± 0.1 (0.157 ± 0.004)	1.35 (0.053)	0.25 (0.010)


Unit : mm (inch)

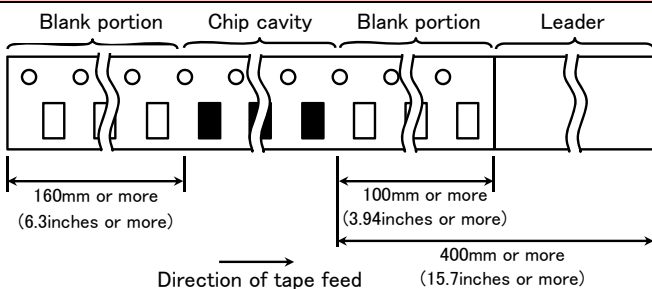④ LEADER AND BLANK PORTION



► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) .

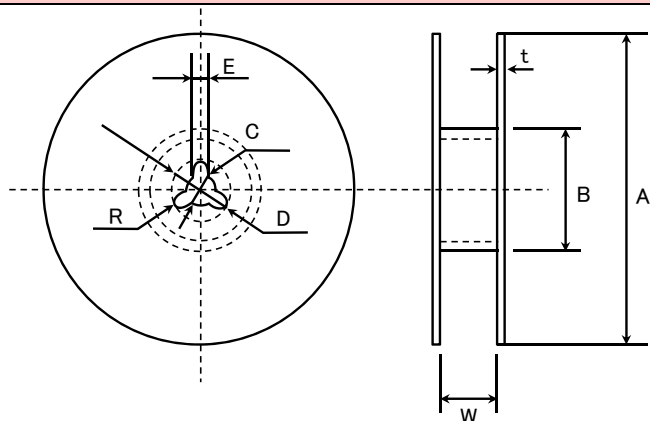⑤ Reel Size




A	B	C	D	E	R
$\phi 178 \pm 2.0$	$\phi 50$ or more	$\phi 13.0 \pm 0.2$	$\phi 21.0 \pm 0.8$	2.0 ± 0.5	1.0

	t	W
4mm width tape	1.5max.	5 ± 1.0
8mm width tape	2.5max.	10 ± 1.5

(Unit : mm)

⑥ Top tape strength

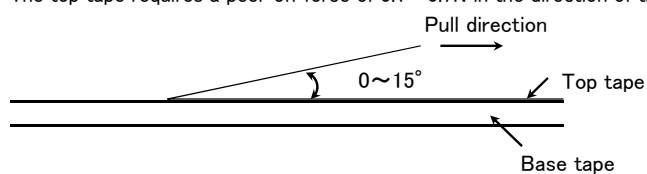The top tape requires a peel-off force of 0.1~0.7N in the direction of the arrow as illustrated below.



Multilayer chip inductors

Multilayer chip inductors for high frequency, Multilayer chip bead inductors

Multilayer common mode choke coils (MC series F type)

Metal Multilayer Chip Power Inductors (MCOIL™ MC series)

RELIABILITY DATA


1. Operating Temperature Range		
Specified Value	BK series	−55~+125°C
	BKH series	
	BKP series	−55~+85°C
	MCF series	−40~+85°C
	CK series	−40~+85°C
	CKS series	
	CKP series	
	LK series	
	HK0603, HK1005	−55~+125°C
	HK1608, HK2125	−40~+85°C
	HKQ0603	−55~+125°C
	AQ105	
	MCOIL™ MC series	−40~+125°C (Including self-generated heat)
2. Storage Temperature Range		
Specified Value	BK series	−55~+125°C
	BKH series	
	BKP series	−55~+85°C
	MCF series	−40~+85°C
	CK series	−40~+85°C
	CKS series	
	CKP series	
	LK series	
	HK0603, HK1005	−55~+125°C
	HK1608, HK2125	−40~+85°C
	HKQ0603	−55~+125°C
	AQ105	
	MCOIL™ MC series	−40~+85°C
3. Rated Current		
Specified Value	BK series	The temperature of the element is increased within 20°C.
	BKH series	
	BKP series	The temperature of the element is increased within 40°C
	MCF series	Refer to each specification.
	CK series	The temperature of the element is increased within 20°C.
	CKS series	
	CKP series	The temperature of the element is increased within 40°C
	LK series	The decreasing-rate of inductance value is within 5 %
	HK0603, HK1005	The decreasing-rate of inductance value is within 5 %, or the temperature of the element is increased within 20°C
	HK1608, HK2125	
	HKQ0603	
	AQ105	
	MCOIL™ MC series	Idc1: The decreasing-rate of inductance value is within 30 % Idc2: The temperature of the element is increased within 40°C

4. Impedance			
Specified Value	BK series	Refer to each specification.	
	BKH series		
	BKP series		
	MCF series		
Test Methods and Remarks	BK0603Series, BKP0603Series, BKH Series Measuring frequency : 100±1MHz Measuring equipment : 4991A(or its equivalent) Measuring jig : 16193A(or its equivalent)		
	BK1005Series, BKP1005Series ,BKH1005Series Measuring frequency : 100±1MHz Measuring equipment : 4291A(or its equivalent) Measuring jig : 16192A (or its equivalent) , HW:16193A (or its equivalent)		
	BK1608・2125Series, BKP1608・2125Series Measuring frequency : 100±1MHz Measuring equipment : 4291A(or its equivalent), 4195A(or its equivalent) Measuring jig : 16192A(or its equivalent), HW:16193A(or its equivalent)		
	BK2010・3216Series Measuring frequency : 100±1MHz Measuring equipment : 4291A(or its equivalent), 4195A(or its equivalent) Measuring jig : 16192A(or its equivalent)		
	MCF Series Measuring frequency : 100±1MHz Measuring equipment : 4291A(or its equivalent)		
	5. Inductance		
	Specified Value	CK series	Refer to each specification.
		CKS series	
		CKP series	
		LK series	
		HK0603, HK1005	
HK1608, HK2125			
HKQ0603			
AQ105			
Test Methods and Remarks	MCOIL™ MC series		
	CK、CKS、LK Series Measuring frequency : Refer to each specification. Measuring equipment /jig : 1608,2125⇒4294A+16092A(or its equivalent) 1005⇒4291A+16193A(or its equivalent)		
	Measuring current : 047～4.7 μH ⇒1mArms 、 5.6～33 μH ⇒0.1mArms		
	CKP、MCOIL™ MC Series Measuring frequency : 1MHz Measuring equipment : 4285A(or its equivalent)		
	HK0603、HK1005、AQ Series Measuring frequency : 100MHz Measuring equipment /jig : HK0603⇒ E4991A+16197A(or its equivalent) , AQ105⇒4291A+16197A(or its equivalent) HK1005⇒ 4291A+16193A(or its equivalent)		
	HK1608、HK2125 Series Measuring frequency : ～100nH⇒100MHz 、 120nH～⇒50MHz Measuring equipment /jig : 4291A+16092A(or its equivalent)		
	HKQ Series Measuring frequency : 500MHz Measuring equipment /jig : E4991A+16197A(or its equivalent)		

6. Q

7. DC Resistance	
------------------	--

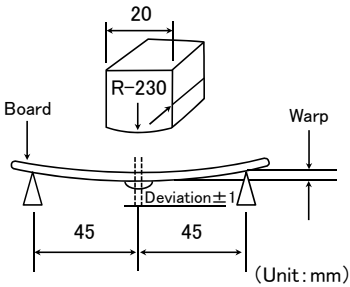8. Self Resonance Frequency(SRF)

9. Resistance to Flexure of Substrate		
Specified Value	BK series	No mechanical damage.
	BKH series	
	BKP series	
	MCF series	
	CK series	
	CKS series	
	CKP series	
	LK series	
	HK0603, HK1005	
	HK1608, HK2125	
	HKQ0603	
	AQ105	
	MCOIL™ MC series	
Test Methods and Remarks	Warp : 2mm (BK Series, BKP, BKH1005, CK, CKS, CKP, LK, HK, HKQ0603S, HKQ0603U, AQ Series, MCF1210, MC Series)	
	Testing board : 1mm (BKH0603, MCF Series without 1210 size.) Thickness : glass epoxy-resin substrate Thickness : 0.8mm	

10. Solderability		
Specified Value	BK series	At least 90% of terminal electrode is covered by new solder.
	BKH series	
	BKP series	
	MCF series	
	CK series	
	CKS series	
	CKP series	
	LK series	
	HK0603, HK1005	
	HK1608, HK2125	
	HKQ0603	
	AQ105	
	MCOIL™ MC series	
Test Methods and Remarks	Solder temperature : 230±5°C (JIS Z 3282 H60A or H63A)	
	Solder temperature : 245±3°C (Sn/3.0Ag/0.5Cu)	
	Duration : 4±1 sec.	

11. Resistance to Soldering		
Specified Value	BK series	Appearance: No significant abnormality Impedance change: Within $\pm 30\%$
	BKH series	
	BKP series	
	MCF series	Appearance: No significant abnormality Impedance change: Within $\pm 20\%$
	CK series	Appearance: No significant abnormality Inductance change: R10 $\sim$ 4R7 $\Rightarrow$ Within $\pm 10\%$ 、6R8 $\sim$ 100 $\Rightarrow$ Within $\pm 15\%$
	CKS series	Appearance: No significant abnormality Inductance change: Within $\pm 20\%$
	CKP series	Appearance: No significant abnormality Inductance change: Within $\pm 30\%$
	LK series	Appearance: No significant abnormality Inductance change: 1005 $\Rightarrow$ Within $\pm 15\%$ 1608,2125 $\Rightarrow$ 47N $\sim$ 4R7: Within $\pm 10\%$ 5R6 $\sim$ 330: Within $\pm 15\%$
	HK0603, HK1005	Appearance: No significant abnormality Inductance change: Within $\pm 5\%$
	HK1608, HK2125	
	HKQ0603	
	AQ105	
	MCOIL™ MC series	Appearance: No significant abnormality Inductance change: Within $\pm 10\%$
Test Methods and Remarks	Solder temperature : $260\pm 5^{\circ}\text{C}$ Duration : 10 ± 0.5 sec. Preheating temperature : 150 to 180°C Preheating time : 3 min. Flux : Immersion into methanol solution with colophony for 3 to 5 sec. Recovery : 2 to 3 hrs of recovery under the standard condition after the test. (See Note 1)	

(Note 1) When there are questions concerning measurement result; measurement shall be made after 48 ± 2 hrs of recovery under the standard condition.

12. Thermal Shock		
Specified Value	BK series	Appearance: No significant abnormality Impedance change: Within $\pm 30\%$
	BKH series	
	BKP series	
	MCF series	Appearance: No significant abnormality Impedance change: Within $\pm 20\%$
	CK series	Appearance: No significant abnormality Inductance change: Within $\pm 20\%$
	CKS series	
	CKP series	Appearance: No significant abnormality Inductance change: Within $\pm 30\%$
	LK series	Appearance: No significant abnormality Inductance change: Within $\pm 10\%$ Q change: Within $\pm 30\%$
	HK0603, HK1005	Appearance: No significant abnormality Inductance change: Within $\pm 10\%$ Q change: Within $\pm 20\%$
	HK1608, HK2125	
	HKQ0603	
	AQ105	
	MCOIL™ MC series	Appearance: No significant abnormality Inductance change: Within $\pm 10\%$
Test Methods and Remarks	Conditions for 1 cycle	
	Step	temperature ($^{\circ}\text{C}$)
	1	Minimum operating temperature $+0/-3$
	2	Room temperature
	3	Maximum operating temperature $+3/-0$
	4	Room temperature
	Number of cycles: 5	
	Recovery: 2 to 3 hrs of recovery under the standard condition after the test. (See Note 1)	

(Note 1) When there are questions concerning measurement result; measurement shall be made after 48 ± 2 hrs of recovery under the standard condition.

13. Damp Heat (Steady state)		
Specified Value	BK series	Appearance: No significant abnormality Impedance change: Within $\pm 30\%$
	BKH series	
	BKP series	
	MCF series	Appearance: No significant abnormality Impedance change: Within $\pm 20\%$
	CK series	Appearance: No significant abnormality Inductance change: Within $\pm 20\%$
	CKS series	
	CKP series	Appearance: No significant abnormality Inductance change: Within $\pm 30\%$
	LK series	Appearance: No significant abnormality Inductance change: 1005,1608 $\Rightarrow$ Within $\pm 10\%$ 2125 $\Rightarrow$ Within $\pm 20\%$ Q change: Within $\pm 30\%$
	HK0603, HK1005	Appearance: No significant abnormality Inductance change: Within $\pm 10\%$ Q change: Within $\pm 20\%$
	HK1608, HK2125	
	HKQ0603	
	AQ105	
	MCOIL TM MC series	Appearance: No significant abnormality Inductance change: Within $\pm 10\%$
Test Methods and Remarks	BK, BKP, BKH, LK, CK, CKS, CKP, MCF Series: Temperature : $40 \pm 2^{\circ}\text{C}$ Humidity : 90 to 95%RH Duration : 500 +24/-0 hrs Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber.(See Note 1)	
	HK, HKQ, AQ, MCOIL TM MC series: Temperature : $60 \pm 2^{\circ}\text{C}$ Humidity : 90 to 95%RH Duration : 500 +24/-0 hrs Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber.(See Note 1)	

(Note 1) When there are questions concerning measurement result; measurement shall be made after 48 ± 2 hrs of recovery under the standard condition.

14. Loading under Damp Heat		
Specified Value	BK series	Appearance: No significant abnormality Impedance change: Within $\pm 30\%$
	BKH series	
	BKP series	
	MCF series	—
	CK series	Appearance: No significant abnormality
	CKS series	Inductance change: Within $\pm 20\%$
	CKP series	Appearance: No significant abnormality Inductance change: Within $\pm 30\%$
	LK series	Appearance: No significant abnormality Inductance change: $1005 \Rightarrow$ Within $\pm 10\%$ $1608 \Rightarrow 0.047 \sim 12.0 \mu\text{H}$: Within $\pm 10\%$ $15.0 \sim 33.0 \mu\text{H}$: Within $\pm 15\%$ $2125 \Rightarrow$ Within $\pm 20\%$ Q change: Within $\pm 30\%$
	HK0603, HK1005	Appearance: No significant abnormality Inductance change: Within $\pm 10\%$ Q change: Within $\pm 20\%$
	HK1608, HK2125	
	HKQ0603	
	AQ105	
	MCOIL™ MC series※	Appearance: No significant abnormality Inductance change: Within $\pm 10\%$
Test Methods and Remarks	BK, BKP, BKH, LK, CK, CKS, CKP Series:	
	Temperature : $40 \pm 2^\circ\text{C}$ Humidity : 90 to 95%RH Applied current : Rated current Duration : 500 +24/-0 hrs Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber. (See Note 1)	
	HK, HKQ, AQ, MCOIL™ MC Series:	
	Temperature : $60 \pm 2^\circ\text{C}$ Humidity : 90 to 95%RH Applied current : Rated current ※MC series ; I_{dc2max} Duration : 500 +24/-0 hrs Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber. (See Note 1)	

Note on standard condition: "standard condition" referred to herein is defined as follows:

5 to 35°C of temperature, 45 to 85% relative humidity, and 86 to 106kPa of air pressure.

When there are questions concerning measurement results:

In order to provide correlation data, the test shall be conducted under condition of $20 \pm 2^\circ\text{C}$ of temperature, 60 to 70% relative humidity, and 86 to 106kPa of air pressure.

Unless otherwise specified, all the tests are conducted under the "standard condition."

(Note 1) Measurement shall be made after 48 ± 2 hrs of recovery under the standard condition.

15. Loading at High Temperature		
Specified Value	BK series	Appearance: No significant abnormality Impedance change: Within $\pm 30\%$
	BKH series	
	BKP series	
	MCF series	Appearance: No significant abnormality Impedance change: Within $\pm 20\%$
	CK series	Appearance: No significant abnormality Inductance change: Within $\pm 20\%$
	CKS series	
	CKP series	Appearance: No significant abnormality Inductance change: Within $\pm 30\%$
	LK series	Appearance: No significant abnormality Inductance change: 1005 $\Rightarrow$ Within $\pm 10\%$ 1608 $\Rightarrow 0.047 \sim 12.0 \mu\text{H}$: Within $\pm 10\%$ 15.0 $\sim 33.0 \mu\text{H}$: Within $\pm 15\%$ 2125 $\Rightarrow$ Within $\pm 20\%$ Q change: Within $\pm 30\%$
	HK0603, HK1005	Appearance: No significant abnormality Inductance change: Within $\pm 10\%$ Q change: Within $\pm 20\%$
	HK1608, HK2125	
	HKQ0603	
	AQ105	
	MCOIL™ MC series※	Appearance: No significant abnormality Inductance change: Within $\pm 10\%$
Test Methods and Remarks	Temperature : Maximum operating temperature Applied current : Rated current ※MC series ; Idc2max Duration : 500 +24/-0 hrs Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber. (See Note 1)	

Note on standard condition: "standard condition" referred to herein is defined as follows:

5 to 35°C of temperature, 45 to 85% relative humidity, and 86 to 106kPa of air pressure.

When there are questions concerning measurement results:

In order to provide correlation data, the test shall be conducted under condition of $20 \pm 2^\circ\text{C}$ of temperature, 60 to 70% relative humidity, and 86 to 106kPa of air pressure. Unless otherwise specified, all the tests are conducted under the "standard condition."

(Note 1) Measurement shall be made after 48 ± 2 hrs of recovery under the standard condition.

Precautions on the use of Multilayer chip inductors

Multilayer chip inductors for high frequency, Multilayer chip bead inductors

Multilayer common mode choke coils(MC series F type)

PRECAUTIONS

1. Circuit Design	
Precautions	◆Verification of operating environment, electrical rating and performance 1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any inductors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications. ◆Operating Current (Verification of Rated current) 1. The operating current including inrush current for inductors must always be lower than their rated values. 2. Do not apply current in excess of the rated value because the inductance may be reduced due to the magnetic saturation effect.

2. PCB Design	
Precautions	◆Pattern configurations(Design of Land-patterns) 1. When inductors are mounted on a PCB, the size of land patterns and the amount of solder used(size of fillet) can directly affect inductor performance. Therefore, the following items must be carefully considered in the design of solder land patterns: (1) The amount of solder applied can affect the ability of chips to withstand mechanical stresses which may lead to breaking or cracking. Therefore, when designing land-patterns it is necessary to consider the appropriate size and configuration of the solder pads which in turn determines the amount of solder necessary to form the fillets. (2) When more than one part is jointly soldered onto the same land or pad, the pad must be designed so that each component's soldering point is separated by solder-resist. (3) The larger size of land patterns and amount of solder, the smaller Q value after mounting on PCB. It makes higher the Q value to design land patterns smaller than terminal electrode of chips. ◆Pattern configurations(Inductor layout on panelized[breakaway] PC boards) 1. After inductors have been mounted on the boards, chips can be subjected to mechanical stresses in subsequent manufacturing processes (PCB cutting, board inspection, mounting of additional parts, assembly into the chassis, wave soldering the reflow soldered boards etc.)For this reason, planning pattern configurations and the position of SMD inductors should be carefully performed to minimize stress.

◆Pattern configurations(Design of Land-patterns)

1. The following diagrams and tables show some examples of recommended patterns to prevent excessive solder amounts (larger fillets which extend above the component end terminations). Examples of improper pattern designs are also shown.

(1) Recommended land dimensions for a typical chip inductor land patterns for PCBs

●Recommended land dimensions for Multilayer inductor

Wave-soldering (Unit:mm)

Type		1608	2012	2125	2016	2520	3216
Size	L	1.6	2.0	2.0	2.0	2.5	3.2
	W	0.8	1.25	1.25	1.6	2.0	1.6
A		0.8~1.0	1.0~1.4	1.0~1.4	1.0~1.4	1.0~1.4	1.8~2.5
B		0.5~0.8	0.8~1.5	0.8~1.5	0.8~1.5	0.6~1.0	0.8~1.7
C		0.6~0.8	0.9~1.2	0.9~1.2	1.3~1.6	1.6~2.0	1.2~1.6

Reflow-soldering (Unit:mm)

Type		0603	1005	105	1608	2012	2125	2016	2520	3216
Size	L	0.6	1.0	1.0	1.6	2.0	2.0	2.0	2.5	3.2
	W	0.3	0.5	0.6	0.8	1.25	1.25	1.6	2.0	1.6
A		0.20~0.30	0.45~0.55	0.50~0.55	0.8~1.0	0.8~1.2	0.8~1.2	0.8~1.2	1.0~1.4	1.8~2.5
B		0.20~0.30	0.40~0.50	0.30~0.40	0.6~0.8	0.8~1.2	0.8~1.2	0.8~1.2	0.6~1.0	0.6~1.5
C		0.25~0.40	0.45~0.55	0.60~0.70	0.6~0.8	0.9~1.6	0.9~1.6	1.2~2.0	1.8~2.2	1.2~2.0

●Recommended land dimension for Array type

(Unit:mm)


Type		2010	3216
Size	L	2.0	3.2
	W	1.0	1.6
a		0.5~0.6	0.7~0.9
b		0.5~0.6	0.8~1.0
c		0.2~0.3	0.4~0.5
d		0.5	0.8

Technical
considerations

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
 For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) .


● Recommended land dimension for Multilayer common mode choke coil
(Unit: mm)

Type		0605	0806
Size	L	0.65	0.85
	W	0.50	0.65
a		0.27~0.30	0.25~0.35
b		0.17~0.20	0.25~0.35
c		0.20~0.26	0.25~0.35
d		0.4	0.5











(Unit: mm)

Type		1210
Size	L	1.0
	W	1.25
a		0.45~0.55
b		0.7~0.8
c		0.25~0.35
d		0.55





(2) Examples of good and bad solder application

Item	Not recommended	Recommended
Mixed mounting of SMD and leaded components		
Component placement close to the chassis		
Hand-soldering of leaded components near mounted components		
Horizontal component placement		


◆ Pattern configurations (Inductor layout on panelized[breakaway] PC boards)

1-1. The following are examples of good and bad inductor layout; SMD inductors should be located to minimize any possible mechanical stresses from board warp or deflection.

Item	Not recommended	Recommended
Deflection of the board		 Position the component at a right angle to the direction of the mechanical stresses that are anticipated.

1-2. To layout the inductors for the breakaway PC board, it should be noted that the amount of mechanical stresses given will vary depending on inductor layout.

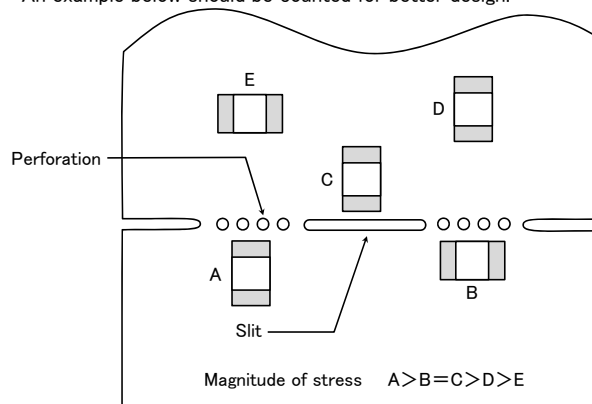An example below should be counted for better design.



1-3. When breaking PC boards along their perforations, the amount of mechanical stress on the inductors can vary according to the method used. The following methods are listed in order from least stressful to most stressful: push-back, slit, V-grooving, and perforation. Thus, any ideal SMD inductor layout must also consider the PCB splitting procedure.

3. Considerations for automatic placement

Precautions

◆ Adjustment of mounting machine

1. Excessive impact load should not be imposed on the inductors when mounting onto the PC boards.
2. The maintenance and inspection of the mounter should be conducted periodically.





◆ Selection of Adhesives

1. Mounting inductors with adhesives in preliminary assembly, before the soldering stage, may lead to degraded inductor characteristics unless the following factors are appropriately checked; the size of land patterns, type of adhesive, amount applied, hardening temperature and hardening period. Therefore, it is imperative to consult the manufacturer of the adhesives on proper usage and amounts of adhesive to use.

Technical considerations

◆ Adjustment of mounting machine

1. If the lower limit of the pick-up nozzle is low, too much force may be imposed on the inductors, causing damage. To avoid this, the following points should be considered before lowering the pick-up nozzle:
 - (1) The lower limit of the pick-up nozzle should be adjusted to the surface level of the PC board after correcting for deflection of the board.
 - (2) The pick-up pressure should be adjusted between 1 and 3N static loads.
 - (3) To reduce the amount of deflection of the board caused by impact of the pick-up nozzle, supporting pins or back-up pins should be used under the PC board. The following diagrams show some typical examples of good pick-up nozzle placement:

Item	Improper method	Proper method
Single-sided mounting		
Double-sided mounting		

2. As the alignment pin wears out, adjustment of the nozzle height can cause chipping or cracking of the inductors because of mechanical impact on the inductors. To avoid this, the monitoring of the width between the alignment pin in the stopped position, and maintenance, inspection and replacement of the pin should be conducted periodically.

◆ Selection of Adhesives

1. Some adhesives may cause reduced insulation resistance. The difference between the shrinkage percentage of the adhesive and that of the inductors may result in stresses on the inductors and lead to cracking. Moreover, too little or too much adhesive applied to the board may adversely affect component placement, so the following precautions should be noted in the application of adhesives.

(1) Required adhesive characteristics


- a. The adhesive should be strong enough to hold parts on the board during the mounting & solder process.
- b. The adhesive should have sufficient strength at high temperatures.
- c. The adhesive should have good coating and thickness consistency.
- d. The adhesive should be used during its prescribed shelf life.
- e. The adhesive should harden rapidly.
- f. The adhesive must not be contaminated.
- g. The adhesive should have excellent insulation characteristics.
- h. The adhesive should not be toxic and have no emission of toxic gasses.

- (2) When using adhesives to mount inductors on a PCB, inappropriate amounts of adhesive on the board may adversely affect component placement. Too little adhesive may cause the inductors to fall off the board during the solder process. Too much adhesive may cause defective soldering due excessive flow of adhesive on to the land or solder pad.


[Recommended conditions]





Figure	0805 case sizes as examples
a	0.3mm min
b	100~120 μ m
c	Area with no adhesive

Amount of adhesives



After inductors are bonded



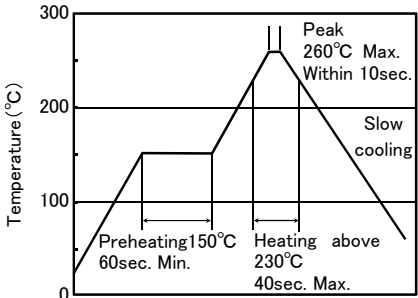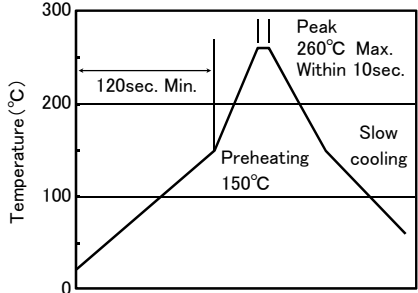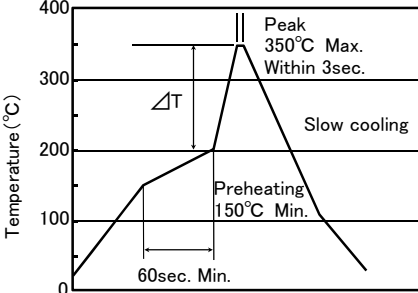Precautions	◆ Selection of Flux 1. Since flux may have a significant effect on the performance of inductors, it is necessary to verify the following conditions prior to use; (1) Flux used should be with less than or equal to 0.1 wt% (Chlorine conversion method) of halogenated content. Flux having a strong acidity content should not be applied. (2) When soldering inductors on the board, the amount of flux applied should be controlled at the optimum level. (3) When using water-soluble flux, special care should be taken to properly clean the boards. ◆ Soldering 1. Temperature, time, amount of solder, etc. are specified in accordance with the following recommended conditions, and please contact us about peak temperature when you use lead-free paste.
Technical considerations	◆ Selection of Flux 1-1. When too much halogenated substance (Chlorine, etc.) content is used to activate the flux, or highly acidic flux is used, an excessive amount of residue after soldering may lead to corrosion of the terminal electrodes or degradation of insulation resistance on the surface of the Inductor. 1-2. Flux is used to increase solderability in flow soldering, but if too much is applied, a large amount of flux gas may be emitted and may detrimentally affect solderability. To minimize the amount of flux applied, it is recommended to use a flux-bubbling system. 1-3. Since the residue of water-soluble flux is easily dissolved by water content in the air, the residue on the surface of Inductor in high humidity conditions may cause a degradation of insulation resistance and therefore affect the reliability of the components. The cleaning methods and the capability of the machines used should also be considered carefully when selecting water-soluble flux. ◆ Soldering 1-1. Preheating when soldering Preheating: Inductors shall be preheated sufficiently, and the temperature difference between the inductors and solder shall be within 130° C. Cooling: The temperature difference between the components and cleaning process should not be greater than 100°C. Inductors are susceptible to thermal shock when exposed to rapid or concentrated heating or rapid cooling. Therefore, the soldering process must be conducted with a great care so as to prevent malfunction of the components due to excessive thermal shock. [Reflow soldering] 【Recommended condition for Pb-free soldering】  Caution 1. Solder (fillet) should wet up to 1/2 to 1/3 of the thickness of an inductor ideally as shown below:  2. Because excessive dwell time can detrimentally affect solderability, soldering duration shall be kept as close to recommended time as possible. 3. The allowable number of reflow soldering is two (2) times. [Wave soldering] 【Recommended condition for Pb-free soldering】  Caution 1. Make sure the inductors are preheated sufficiently. 2. The temperature difference between the inductor and melted solder should be within 130°C. 3. Cooling after soldering should be as gradual as possible. 4. The allowable number of wave soldering is one (1) time. 5. Wave soldering must not be applied to the inductors designated as for reflow soldering only. [Hand soldering] 【Recommended condition for Pb-free soldering】  Caution 1. It is recommended to use a 20W soldering iron with a maximum tip diameter of 1.0 mm. 2. The soldering iron shall not directly touch inductors 3. The allowable number of hand soldering is one (1) time

5. Cleaning							
Precautions	◆Cleaning conditions - When cleaning the PC board after the Inductors are all mounted, select the appropriate cleaning solution according to the type of flux used and purpose of the cleaning (e.g. to remove soldering flux or other materials from the production process.) - Cleaning conditions should be determined after verifying, through a test run, that the cleaning process does not affect the inductor's characteristics.						
Technical considerations	◆Cleaning conditions - The use of inappropriate solutions can cause foreign substances such as flux residue to adhere to the inductor, resulting in a degradation of the inductor's electrical properties (especially insulation resistance). - Inappropriate cleaning conditions (insufficient or excessive cleaning) may detrimentally affect the performance of the inductors. In the case of ultrasonic cleaning, too much power output can cause excessive vibration of the PC board which may lead to the cracking of the inductor or the soldered portion, or decrease the terminal electrodes' strength. Therefore, the following conditions should be carefully checked; <table> <tr> <td>Ultrasonic output</td><td>20W/l or less</td></tr> <tr> <td>Ultrasonic frequency</td><td>40kHz or less</td></tr> <tr> <td>Ultrasonic washing period</td><td>5 min. or less</td></tr> </table>	Ultrasonic output	20W/l or less	Ultrasonic frequency	40kHz or less	Ultrasonic washing period	5 min. or less
Ultrasonic output	20W/l or less						
Ultrasonic frequency	40kHz or less						
Ultrasonic washing period	5 min. or less						
6. Resin coating and mold							
Precautions	- With some type of resins a decomposition gas or chemical reaction vapor may remain inside the resin during the hardening period or while left under normal storage conditions resulting in the deterioration of the inductor's performance. - Thermal expansion and thermal shrinkage characteristics of resins may lead to the deterioration of inductors' performance. - When a resin hardening temperature is higher than inductor operating temperature, the stresses generated by the excessive heat may lead to damage in inductors.						
7. Handling							
Precautions	◆Breakaway PC boards (splitting along perforations) - When splitting the PC board after mounting inductors and other components, care is required so as not to give any stresses of deflection or twisting to the board. - Board separation should not be done manually, but by using the appropriate devices. ◆General handling precautions - Always wear static control bands to protect against ESD. - Keep the inductors away from all magnets and magnetic objects. - Use non-magnetic tweezers when handling inductors. - Any devices used with the inductors (soldering irons, measuring instruments) should be properly grounded. - Keep bare hands and metal products (i.e., metal desk) away from inductor electrodes or conductive areas that lead to chip electrodes. - Keep inductors away from items that generate magnetic fields such as speakers or coils. ◆Mechanical considerations Be careful not to subject the inductors to excessive mechanical shocks. - If inductors are dropped on the floor or a hard surface they should not be used. - When handling the mounted boards, be careful that the mounted components do not come in contact with or bump against other boards or components.						
8. Storage conditions							
Precautions	◆Storage To maintain the solderability of terminal electrodes and to keep the packaging material in good condition, care must be taken to control temperature and humidity in the storage area. Humidity should especially be kept as low as possible. - Recommended conditions Ambient temperature: 30°C or below Humidity: 70% RH or below The ambient temperature must be kept below 40°C. Even under ideal storage conditions, solderability of inductor is deteriorated as time passes, so inductors should be used within 6 months from the time of delivery. - Inductor should be kept where no chlorine or sulfur exists in the air.						
Technical considerations	◆Storage If the parts are stocked in a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/package materials may take place. For this reason, components should be used within 6 months from the time of delivery. If exceeding the above period, please check solderability before using the inductors.						